



25VA Toroidal Power Transformer(Dual Input :2*115V, Output:24V×2)

1、 Theory Picture:

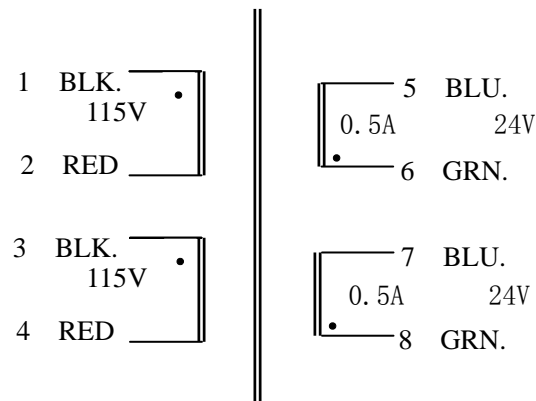


2、 The Transformer Practicality Picture:

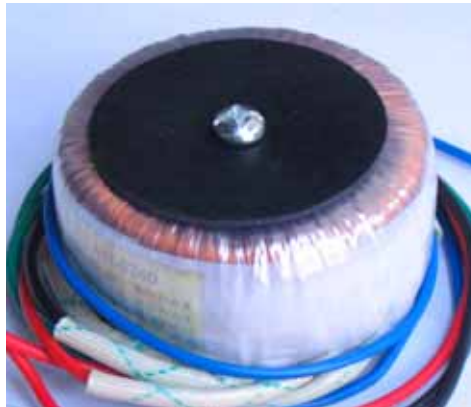

Product	Capacity (VA)	Dimension		Weight (kg)	Install Bore (mm)	Screw (mm)
		D(mm)	H(mm)			
Toroidal Transformer	25	79	34	0.523	φ 6.5	M6
Primary Rated Input			115V/50HZ×2			
Electric Resistance of Primary Directory Current			125 Ω			
Max No-loading Current			5 mA			
Insulation Capability			Primary-Secondary: 500VDC ≥ 100M Ω			
Dielectric Strength Test			Primary-Secondary: 4000V 5mA 60s			
Temperature Rise			≤ 65°C			
Secondary Rated Output						
	No-loading Voltage (V±5%)	Loading Voltage (V±5%)		Rated Loading Current(A)		
S1: 5 ~ 6 、 7 ~ 8	24V×2	21.2 V×2		0.5		
Derivation Line Specification						
	Color		Specification		Length (mm)	Terminals
Line: 1 ~ 2 3 ~ 4	BLK.-RED	BLK.-RED	UL-1672 22#		310	5mmTin
Line: 5 ~ 6 7 ~ 8	BLU.-GRN.	BLU.-GRN.	UL-1015 22#		310	5mmTin

Toroidal Power Transformer Install Sketch Map:

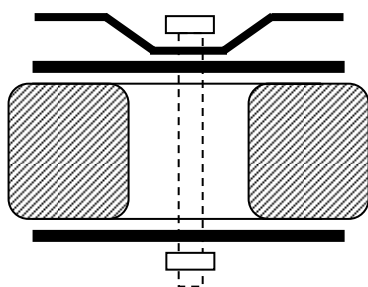

Toroidal Power Transformer Dimension Picture:

